

Vol 4 Issue 2 March 2014

ISSN No : 2230-7850

International Multidisciplinary
Research Journal

*Indian Streams
Research Journal*

Executive Editor
Ashok Yakkaldevi

Editor-in-Chief
H.N.Jagtap

Welcome to ISRJ

RNI MAHMUL/2011/38595

ISSN No.2230-7850

Indian Streams Research Journal is a multidisciplinary research journal, published monthly in English, Hindi & Marathi Language. All research papers submitted to the journal will be double - blind peer reviewed referred by members of the editorial board. Readers will include investigator in universities, research institutes government and industry with research interest in the general subjects.

International Advisory Board

Flávio de São Pedro Filho Federal University of Rondonia, Brazil	Mohammad Hailat Dept. of Mathematical Sciences, University of South Carolina Aiken	Hasan Baktir English Language and Literature Department, Kayseri
Kamani Perera Regional Center For Strategic Studies, Sri Lanka	Abdullah Sabbagh Engineering Studies, Sydney	Ghayoor Abbas Chotana Dept of Chemistry, Lahore University of Management Sciences[PK]
Janaki Sinnasamy Librarian, University of Malaya	Catalina Neculai University of Coventry, UK	Anna Maria Constantinovici AL. I. Cuza University, Romania
Romona Mihaila Spiru Haret University, Romania	Ecaterina Patrascu Spiru Haret University, Bucharest	Horia Patrascu Spiru Haret University, Bucharest,Romania
Delia Serbescu Spiru Haret University, Bucharest, Romania	Loredana Bosca Spiru Haret University, Romania	Ilie Pinteau, Spiru Haret University, Romania
Anurag Misra DBS College, Kanpur	Fabricio Moraes de Almeida Federal University of Rondonia, Brazil	Xiaohua Yang PhD, USA
Titus PopPhD, Partium Christian University, Oradea,Romania	George - Calin SERITAN Faculty of Philosophy and Socio-Political Sciences AL. I. Cuza University, IasiMore

Editorial Board

Pratap Vyamktrao Naikwade ASP College Devrukh,Ratnagiri,MS India	Iresh Swami Ex - VC. Solapur University, Solapur	Rajendra Shendge Director, B.C.U.D. Solapur University, Solapur
R. R. Patil Head Geology Department Solapur University,Solapur	N.S. Dhaygude Ex. Prin. Dayanand College, Solapur	R. R. Yaliker Director Managment Institute, Solapur
Rama Bhosale Prin. and Jt. Director Higher Education, Panvel	Narendra Kadu Jt. Director Higher Education, Pune	Umesh Rajderkar Head Humanities & Social Science YCMOU,Nashik
Salve R. N. Department of Sociology, Shivaji University,Kolhapur	K. M. Bhandarkar Praful Patel College of Education, Gondia	S. R. Pandya Head Education Dept. Mumbai University, Mumbai
Govind P. Shinde Bharati Vidyapeeth School of Distance Education Center, Navi Mumbai	Sonal Singh Vikram University, Ujjain	Alka Darshan Shrivastava Shaskiya Snatkottar Mahavidyalaya, Dhar
Chakane Sanjay Dnyaneshwar Arts, Science & Commerce College, Indapur, Pune	G. P. Patankar S. D. M. Degree College, Honavar, Karnataka	Rahul Shriram Sudke Devi Ahilya Vishwavidyalaya, Indore
Awadhesh Kumar Shirotriya Secretary,Play India Play,Meerut(U.P.)	Maj. S. Bakhtiar Choudhary Director,Hyderabad AP India.	S.KANNAN Annamalai University,TN
	S.Parvathi Devi Ph.D.-University of Allahabad	Satish Kumar Kalhotra Maulana Azad National Urdu University
	Sonal Singh, Vikram University, Ujjain	

Address:-Ashok Yakkaldevi 258/34, Raviwar Peth, Solapur - 413 005 Maharashtra, India
Cell : 9595 359 435, Ph No: 02172372010 Email: ayisrj@yahoo.in Website: www.isrj.net



INFLUENCE OF INJECTION TIMING ON EMISSION ANALYSIS OF A DI ENGINE RUNNING ON RUBBER SEED AND JATROPHA OIL FUELLED WITH DIESEL FUEL

S. Mahalingam¹ and B.R.RameshBapu²

¹Research Scholar, Sathyabama University, Chennai, India
²Dean(R&D), Chennai Institute of Technology, Chennai, India.

Abstract:- The petroleum fuels availability and cost concerns the nonedible oils used as raw materials can be obtained from different oil crops that may be used to reduce the environmental pollution. In the development of alternative, biodegradable, and renewable fuels used for internal combustion (IC) engines to obtain the power. Therefore, in this present study, influence of fuel injection timing on the exhaust emission of a single cylinder, four stroke, and direct injection (DI) diesel engine was considered. It has been experimentally investigated using rubber seed and jatropha seed oil blended diesel fuel from 20% (B20) to 40% (B40) with an increment of 10%. The engine was tested at different loads from no load to full load conditions with diesel fuel at normal injection pressure of 220 bar and fuel injection timing of 240 CA BTDC. The experimental tests were performed at 210 CA BTDC injection timings by changing the thickness of advance shim. The experimental results obtained show that CO and UHC emissions were decreased for the proportion of B20, NO_x and exhaust gas temperature increased with increasing amount of biodiesel concentration in the fuel mixture.

Key Words: Biodiesel, Diesel engine, Emissions, Injection timing.

INTRODUCTION

Most of the power producing machine use petroleum fuels which are limited and estimated to be exhausted in future years. The best alternative solution is a natural source of straight pure vegetable oils can be used as substitute fuels in diesel engines which run to produce power because of their much closed cycle of physical and chemical properties. They are also eco-friendly, non-toxic, safe in storage and easy to transport. Higher thermal efficiency and lower fuel costs makes diesel engines clear choice in applications requiring relatively large amounts of power such as in ships, heavy earth movers and power generation sectors. In general, compression ignitions (CI) have higher thermal efficiencies and formation of nitrogen oxides (NO) emission due to higher compression ratios. R. Adnan [1] was studied the engine performance increased when water injected from 20 BTDC to 200 ATDC with injection duration of 200 CA and 400 CA. It also obtained that water injection timing of 200 ATDC and duration of 200 CA has shown better engine efficiency due to increased gross indicated work and indicated thermal efficiency with lowest NO concentrations. Likos [2] examined the emission characteristics of DI diesel engine when using 10%, 20%, 30% ethanol blended pure diesel fuel. The test result was effective power and NO emissions increased and CO and UHC emissions decreased with the increasing of ethanol concentration amount in the fuel mixture. However, in this work, performance of engine has not been considered. Can et al. [3] studied the effect of ethanol blended with diesel fuel by volume basis on the performance and emissions of a turbocharged indirect injection compression ignition (CI) engine and found exhaust emissions CO and SO₂ reduced and it caused an increase in NO emissions and power reductions. Many types of alternative fuels have some other disadvantages such as higher viscosity with lower volatility and lower heating value when compared to pure diesel. This can lead to the low atomization and mixture concentrations with air that result in slower combustion, lower thermal efficiency and higher emissions [4-5]. Natural gas contains large amount of methane with less percentages ethane, propane, and butane. However, biogas consists of methane and CO₂ (about 60% methane and 40% carbon dioxide) and has lower calorific value than natural gas. Methane in biogas mixes readily with air and has high octane number with high heating values, making it a suitable fuel for spark ignition (SI) engines. The heat energy utilization of biogas is maximized when it is converted into electric power, biogas generator and a less capacity gas engine at a farm, which makes the process less air pollution and energy efficient [6]. Two different type of engine technologies were used to analyze the limited operation range and lack of direct control on fuel injection timing. [7] The injector nozzle design with

narrow spray cone angle for diesel engine combustion by varying the spray cone angle and advanced injection timing. It is found that a carbon monoxide (CO) and NOx emission rises dramatically and combustion efficiency drops significantly and improves the performance of the diesel engine [7]. Cenk Sayin [8] studied about ethanol blended with diesel fuel from 0% to 15% in a single cylinder diesel engine at engine load from 15 to 30 Nm. The experimental tests were conducted at three different injection timings such as 210, 240, 270, 300 and 330 CA BTDC with help of change in advance shim. The retarded injection timings (210 and 240 CA BTDC) at the all test conditions the UHC and CO emissions were decreased and BTE improved. In terms of injection timing advanced as compared to the original injection timing in the all fuel blends gave negative results for all test engine conditions. Ruijun Zhu [9] three diesel- dimethoxymethane (DMM) blends with 15%, 30% and 50% volume fraction with tested at different engine loads and engine speeds. The test result was found that using diesel-DMM blends can improve thermal efficiency and reduction in smoke, CO emissions, and slightly increased NOx emission. The fuel injection timing advanced to improve the fuel efficiency and thermal efficiency. Increasing fuel injection timing reduces exhaust smoke and nano particles number at the cost of increased NOx emission characteristics. The test was found that early fuel injection timing can either increase or decrease nanoparticles in exhaust gas. When advancing fuel injection timing from 200 to 230 CA BTDC, the number of nanoparticles is minimized. The further increasing fuel injection timing from 230 to 260 CA BTDC produces more nanoparticles. Therefore, in this present study, the effects of injection timing and jatropha and rubber seed oil blended with diesel fuel on the engine exhaust temperatures and exhaust emissions were experimentally investigated using a single cylinder constant speed direct injection (DI) diesel engine.

Table 1
Properties of the fuels used in the tests:

Property	Diesel	Rubber seed oil	Jatropha oil	Biodiesel
Sp. Gravity	0.74	0.82	0.96	0.90
Viscosity at 40°C (mm ² /s)	4.15	6.2	4.4	4.2
Calorific Value (KJ/kg)	42000	37700	38500	39500

Experimental setup and test procedure

A single cylinder constant speed DI engine was used to evaluate the engine performance and emission characteristics of biodiesel. The diesel engine runs under different load conditions at a constant speed of 1500 rpm with the different biodiesel proportions. The diesel engine (Kirloskar made) was directly attached with an eddy current dynamometer for varying the loads. Some of measuring devices were attached in the test engine such as orifice meter with U tube manometer for measuring air consumption, the one liter burette for fuel consumption and the Separate biofuel fuel tank. An AVL415 smoke meter was provided for measuring the smoke opacity and exhaust temperatures. The test rig was installed with AVL software to obtain various curves and results during testing operation. A five gas analyzer was used to measure the emission characteristics such as CO, UHC, NOx and exhaust gas temperatures values from the exhaust gas. The specifications of the test engine are described in table 2.

Bore	87.5mm
Stroke	110.0mm
Speed	1500(constant speed)
Compression ratio	17.5:1
Rated power	4.4 kW
Number of cylinders	One
Type of cooling	eddy current dynamometer
Injection timing	240 BTDC
Pressure	30 bar
No. of strokes	4stroke

RESULTS AND DISCUSSIONS

3.1. Carbon monoxide (CO)

CO emission results are presented in Fig.1 for five different engine loads with injection timings. CO exhaust emission of all the test biofuels decreases with increasing engine load except full load condition. The reduction in CO emission of biodiesel is mainly due to the large amount of oxygen content of biodiesel which results in complete combustion in the combustion chamber. From Fig. 1, it can be declared that the CO emission for diesel fuel was higher than that of biodiesel at the proportion of B20 and lower than that of pure diesel at all injection pressures and timing.


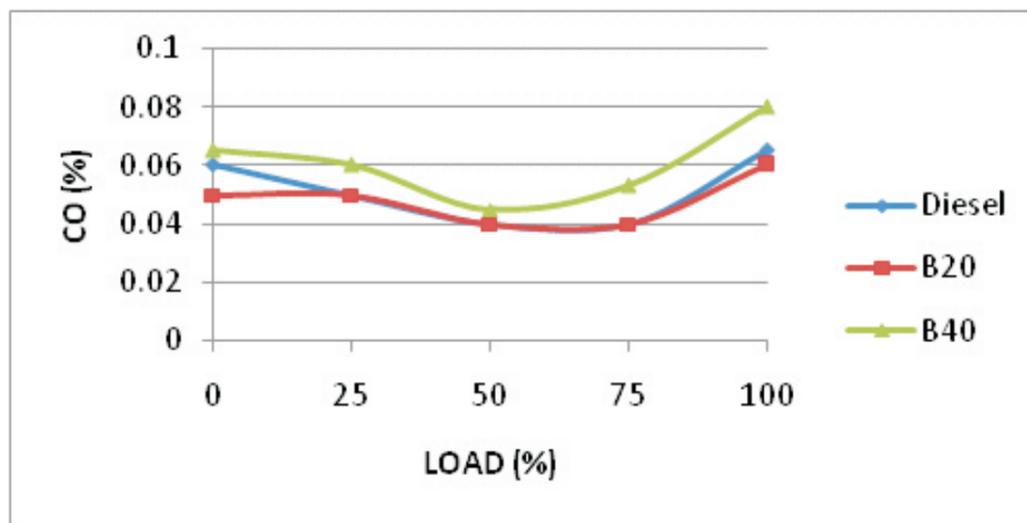


Fig 1.Variation of carbon monoxide with engine load

If the pure diesel is directly supplied inside the engine, the CO emission reduced from no load condition to 75% of load. Further increase at 100% load, the CO increased up to 0.065% for B20 biodiesel supplied, the CO varied from no load from 0.05% to full load condition 0.06%. The biodiesel concentration increased to B40 and the CO increased from no load condition as 0.065% to full load condition as 0.08%. From the result, it was found that B20 gives the positive results compared to other fuels.

3.2. Unburnt Hydrocarbon (UHC)

The variation of unburnt hydrocarbon (UHC) emission for biodiesel fuel compared to the diesel fuel for varying injection timing is given in Fig. 2.

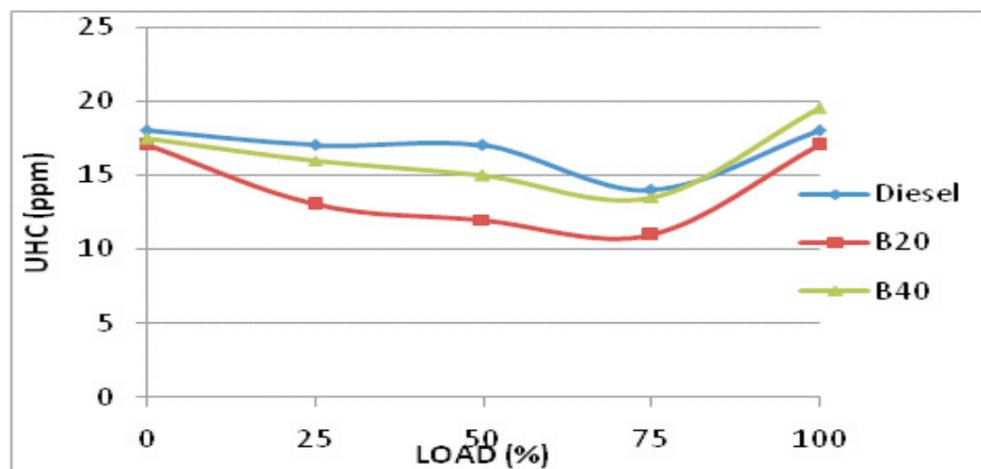

High cetane number and oxygen content available in biodiesel which is lowest UHC exhaust gas emission was observed. UHC emission of biodiesel fuel was slightly lower than that of diesel and biodiesel but it does not depend on the injection parameters such as injection pressure and timing. Minimum UHC emission of 11 ppm was observed with biodiesel fuel at an injection timing of 21° BTDC in 75% load condition, which was 3 ppm higher than that of pure diesel and 2.3 ppm higher than that of B40 blended biodiesel. The biodiesel concentration increased in diesel fuel is due to the lower cetane number present. The lower cetane value reduces the combustion efficiency of biodiesel and increases the exhaust emissions. The compression ratio might be increased and preheating of biofuel causes the complete combustion to take place. The result was found that the B20 and B40 given best result compared to the pure diesel.

3.3. Nitrogen oxides (NOx) emissions

Fig. 3 shows the comparison of NOx emissions for variation of loads from the test engine. One of the most critical exhaust emissions from diesel engines is NOx emissions.

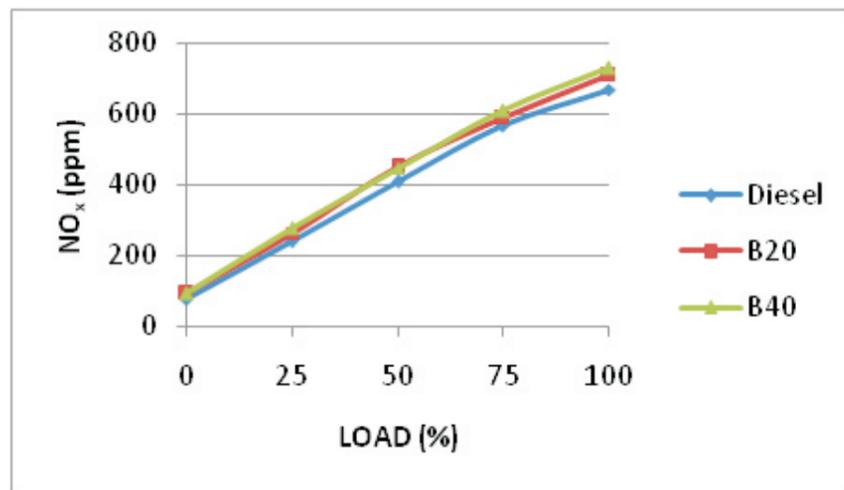


Fig 3. Variation of Nitrogen oxides with engine load

The formation of NOx is highly dependent on the inside cylinder temperature, low oxygen concentration and ignition delay for the reaction to take place [11-12]. NOx concentration generally increased with engine load in all biofuels. The test results indicated that NOx values of diesel were lower than the others. Maximum values of NOx were observed as 432 ppm with B40 and 708 ppm with B20 at 100% of engine load. For the pure diesel, the NOx emission was lower from 79 ppm at no load and 671 ppm at full load conditions. It is very clear from the Fig. 3, the cetane number and oxygen content are more effectively increased in biofuels due to the reduction of NOx and increasing peak pressure in the cylinder. Therefore, the concentration of NOx emission increased for the different engine loads.

3.4. Exhaust Gas Temperature

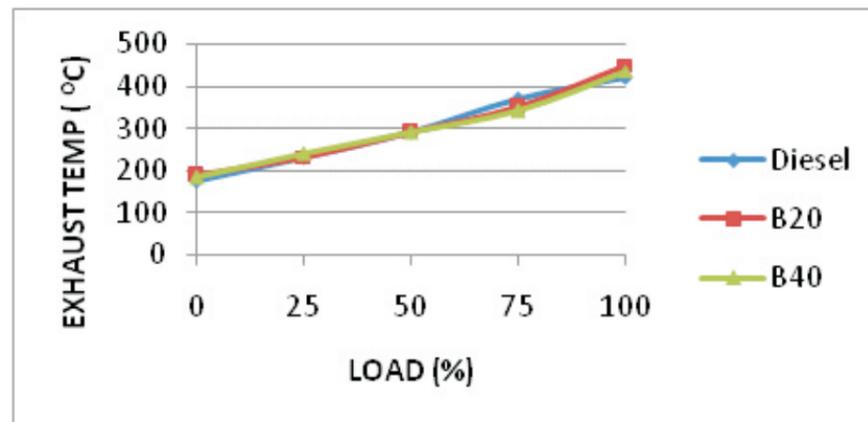


Fig 4. Variation of Exhaust temperature with engine load

The variations of Exhaust Gas Temperature (EGT) with respect to various engine loads are presented in Fig. 4. The EGT is increased with increase in and decreased with increase in compression ratio and injection timing for all the test fuels. The maximum heat energy is utilized to produce the large amount of brake power and minimum of brake specific fuel consumption. It is observed from the results that the exhaust gas temperature varies from 1750C at no load to 4200C at full load for retarded injection timing for pure diesel fuel. For the blended fuels such as B20 and B40 at no load to 75% of load, the EGT was almost closer to the diesel. For the load varied at 100% of full load condition the exhaust gas temperature was increased up to 4500C. The injection timing was retarded at 210BTDC; the exhaust gas temperature is less compared to the designed injection timing.

CONCLUSIONS

Experimental investigations have been carried out to determine the emission characteristics of DI engine. Between the jatropha and rubber seed oils, there were few differences in the results from the engine tests. Compared to fossil diesel fuel, however, there were a limited significant differences when using the plant oils. Conclusions drawn from this study are as follows.

- (a) In CO emission test, the load is increased from no load to at 75% of load condition the B20 of experimental valves was deduced. It was very closer to the pure diesel fuel valves. The CO of blended fuel at B20 gives the better performance compared to the B40.
- (b) Very low amount of UHC was achieved for B20 from no load to full load condition. It was varied from 16 ppm to full load 18 ppm. Another blended fuel of B40 also reduces the UHC emission as compared to the pure diesel fuel in all test conditions.
- (c) The NO_x and exhaust gas temperatures were increased from no load to full load condition in all test fuels. The blended fuels B20 and B40 were very closer to the pure diesel. It also concluded that if the fuel injection timing decreases, the emission characteristics such as CO, UHC were reduced.

REFERENCES:

1. Adnan, H.H. Masjuki, T.M.I. Mahlia Performance and emission analysis of hydrogen fueled compression ignition engine with variable water injection timing, *Energy* 46 (2012) 416–426.
2. Likos B and Callaha TL. Performance and emissions of ethanol and ethanol–diesel blends in direct-injected and pre-chamber diesel engines. SAE paper 821039.
3. Can O, Celikten I, Usta N. Effects of ethanol addition on performance and emissions of turbocharged indirect injection engine running at different injection pressures. *Energy Convers Manage* 2004; 45:2429–40.
4. J. Narayana Reddy, A. Ramesh, Parametric studies for improving the performance of a Jatropha oil-fuelled compression ignition engine, *Renewable Energy* 31(2006) 1994–2016.
5. G. Knothe, Dependence of biodiesel fuel properties on the structure of fatty acialkyl esters, *Fuel Process Technology* 86 (2005) 1059–1070.
6. Jeong C, Kim T, Lee K, Song S, Chun KM. Generating efficiency and emissions of a spark-ignition gas engine generator fuelled with biogas–hydrogen blends. *Int J Hydrogen Energy* 2009; 34:9620–7.
7. Santoso H, Matthews J, Cheng WK. Managing SI/HCCI dual-mode engine operation. SAE Paper No. 2005-01-0162.
8. Lechner GA, Jacobs T, Chryssakis C, Assanis DN, Siewert RM. Evaluation of a narrow spray cone angle, advanced injection timing strategy to achieve partially premixed compression ignition combustion in a diesel engine. SA paper 2005-01-0167; 2005.
9. Cenk Sayin, Mustafa Canakci Effects of injection timing on the engine performance and exhaust emissions of a dual-fuel diesel engine *Energy Conversion and Management* 50 (2009) 203–213.
10. Ruijun Zhu, Haiyan Miao, Xibin Wang, Zuohua Huang Effects of fuel constituents and injection timing on combustion and emission characteristics of a compression-ignition engine fuelled with diesel-DMM blends, *proceeding of the combustion institute* 34 (2013) 2013-3020.
11. Ajav EA, Singh B, Bhattacharya TK. Performance of a stationary diesel engine using vaporized ethanol as supplementary fuel. *Biomass and Bioenergy* 1998; 15:493–502.
12. Andrea TD, Henshaw PF, Ting DS. The addition of hydrogen to gasoline-fuelled SI engine. *International Journal of Hydrogen Energy* 2004; 29:1541–52.



S. Mahalingam

ASSISTANT PROFESSOR

Publish Research Article
International Level Multidisciplinary Research Journal
For All Subjects

Dear Sir/Mam,

We invite unpublished Research Paper, Summary of Research Project, Theses, Books and Book Review for publication, you will be pleased to know that our journals are

Associated and Indexed, India

- * International Scientific Journal Consortium
- * OPEN J-GATE

Associated and Indexed, USA

- * Google Scholar
- * EBSCO
- * DOAJ
- * Index Copernicus
- * Publication Index
- * Academic Journal Database
- * Contemporary Research Index
- * Academic Paper Database
- * Digital Journals Database
- * Current Index to Scholarly Journals
- * Elite Scientific Journal Archive
- * Directory Of Academic Resources
- * Scholar Journal Index
- * Recent Science Index
- * Scientific Resources Database
- * Directory Of Research Journal Indexing

Indian Streams Research Journal
258/34 Raviwar Peth Solapur-413005, Maharashtra
Contact-9595359435
E-Mail-ayisrj@yahoo.in/ayisrj2011@gmail.com
Website : www.isrj.net